

## Prionet Instellingen Counterpath X-Lite v3.0

Installeer de software volgens de default setup instellingen.

Onderstaande instellingen zijn getest op een Windows XP met SP-3 PC en werken.

Vul bij user name en Authorization user name het telefoonnummer in zoals u dat van PrioNet hebt gekregen. Zet bij Password het sip password van het account.

Verder het scherm volgen zoals afgebeeld.


De voicemail tab is alleen van toepassing als u voicemail op de X-Lite wilt gebruiken. Standaard is dit aanwezig in het PrioNet platform.

Let op! Dat u bij het tabblad Presence en Advanced de timers op 1800 sec zet.

Zet voor de eerste test uw interne firewall uit, en zorg dat deze de juiste instellingen heeft als u hem weer aan zet.

Lees voor firewall settings ons online document op;

<http://www.prionet.nl/docs/prionet-whitepaper-firewallconfiguratie.pdf>

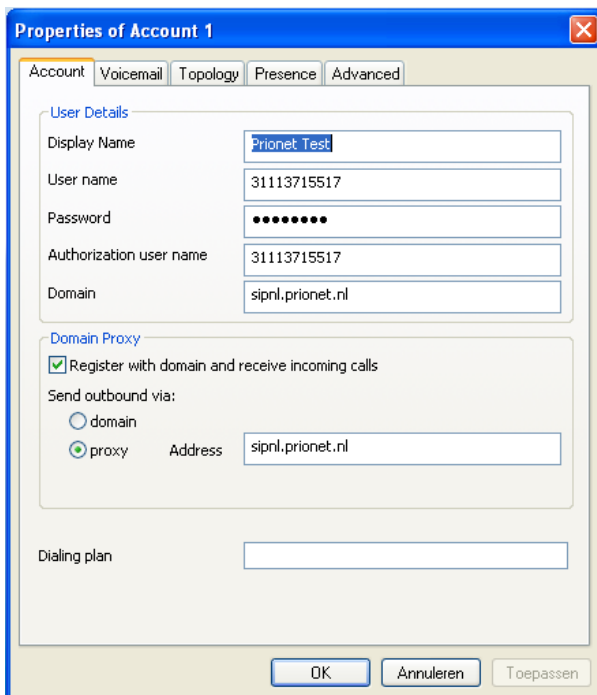

**Properties of Account 1**

Account | Voicemail | Topology | Presence | Advanced

User Details

Display Name: PrioNet Test

User name: 31113715517

Password: ••••••••

Authorization user name: 31113715517

Domain: sipnl.prionet.nl

Domain Proxy

Register with domain and receive incoming calls


Send outbound via:

domain

proxy Address: sipnl.prionet.nl

Dialing plan: \_\_\_\_\_

OK Annuleren Toepassen

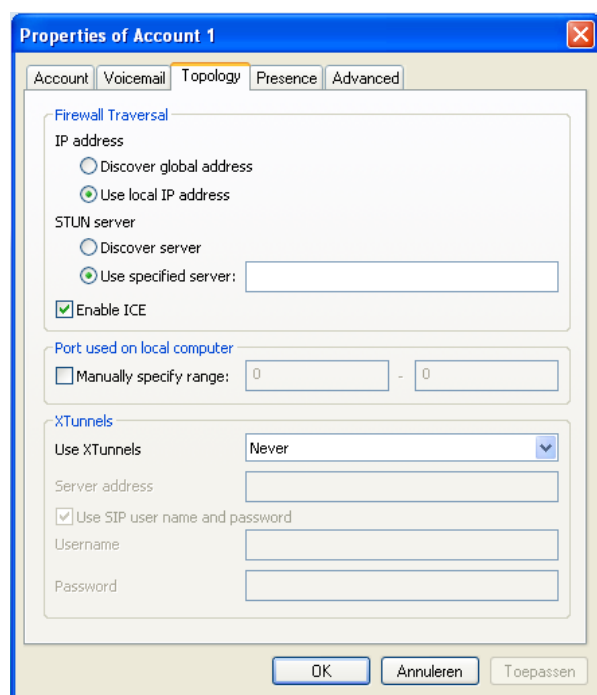

**Properties of Account 1**

Account | Voicemail | Topology | Presence | Advanced

Firewall Traversal

IP address

Discover global address

Use local IP address

STUN server

Discover server

Use specified server: \_\_\_\_\_

Enable ICE

Port used on local computer

Manually specify range: 0 - 0

XTunnels

Use XTunnels: Never


Server address: \_\_\_\_\_

Use SIP user name and password

Username: \_\_\_\_\_

Password: \_\_\_\_\_

OK Annuleren Toepassen

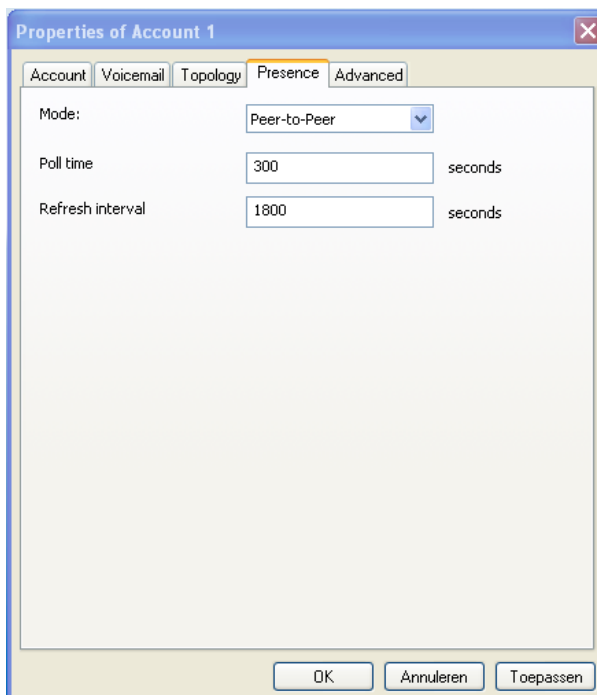

**Properties of Account 1**


Account | Voicemail | Topology | Presence | Advanced

Mode: Peer-to-Peer

Poll time: 300 seconds

Refresh interval: 1800 seconds

OK Annuleren Toepassen

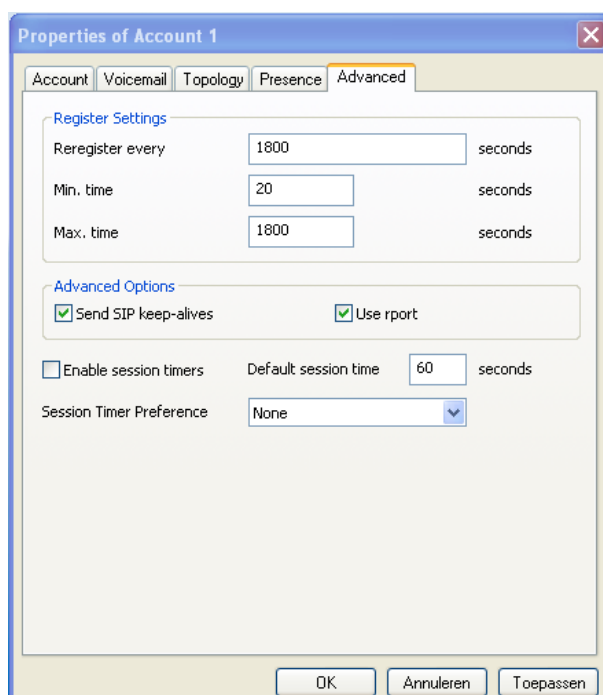

**Properties of Account 1**

Account | Voicemail | Topology | Presence | Advanced

Register Settings

Reregister every: 1800 seconds

Min. time: 20 seconds

Max. time: 1800 seconds

Advanced Options

Send SIP keep-alives

Use rport

Enable session timers Default session time: 60 seconds

Session Timer Preference: None

OK Annuleren Toepassen